

86/11/80
09/14/98
PTO
511 U.S. PTO
09/134478

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD

SUITE 500 EAST

FALLS CHURCH, VA 22042

USA

(703) 205-8000

FAX: (703) 205-8050

(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com

web: http://www.bskb.com

IRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER*
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
C. JOSEPH FARACI
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III

OF COUNSEL:
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET.)*

*ADMITTED TO A BAR OTHER THAN VA.

SENIOR COUNSEL:
ANTHONY L. BIRCH*
GARY D. YACURA
THOMAS S. AUCHTERLONIE
MICHAEL R. CAMMARATA
JAMES T. ELLER, JR.
SCOTT L. LOWE
JOSEPH H. KIM, PH.D.*
RICHARD S. MYERS, JR.*
MARY ANN CAPRIA
MICHAEL J. CORNELISON*
MARK J. NUEL, PH.D.
ROBERT V. RACUNAS

REG. PATENT AGENTS:
FREDERICK R. HANDREN
ANDREW J. TELESZ, JR.
MARYANNE LIOTTA, PH.D.
MAKI HATSUMI
D. RICHARD ANDERSON
STEVEN P. WIGMORE
ESTHER H. CHIN
MIKE S. RYU
W. KARL RENNER
CRAIG A. McROBBIE
PAUL C. LEWIS

511 U.S. PTO
09/134478
08/14/98

Date: August 14, 1998

Docket No.: 2091-0162P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): NOGUCHI, Takafumi

For: METHOD OF ADJUSTING THE BRIGHTNESS OF AN IMAGE, DIGITAL
CAMERA AND IMAGE PROCESSOR USING THE METHOD

Enclosed are:

X A specification consisting of 27 pages

X 3 sheet(s) of Formal drawings

X An assignment of the invention

X Certified copy of Priority Document(s)

X Executed Declaration X Original Photocopy

 A verified statement to establish small entity status under 37
CFR 1.9 and 37 CFR 1.27

X Preliminary Amendment

X Information Disclosure Statement, PTO-1449 and reference(s)

Other _____

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$790.00 *****	or	**** **** \$395.00 ****
TOTAL CLAIMS	16 - 20 =	0	x22 =\$ 0.00	or	x 11 = \$ 0.00
INDEPENDENT	3 - 3 =	0	x82 =\$ 0.00	or	x 41 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+270 = \$ 0.00	or	+135 = \$ 0.00
TOTAL \$ 790.00				TOTAL \$ 0.00	

X A check in the amount of \$ 830.00 to cover the filing fee and recording fee (if applicable) is enclosed.

_____ Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

_____ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By Michael K. Mutter #35,291

MICHAEL K. MUTTER

Reg. No. 29,680

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000
MKM/tnp

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicants: Takafumi NOGUCHI et al.
Serial No.: New Group:
Filed: August 14, 1998 Examiner:
For: METHOD OF ADJUSTING THE BRIGHTNESS OF AN IMAGE,
DIGITAL CAMERA AND IMAGE PROCESSOR USING THE METHOD

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
BOX PATENT APPLICATION
Washington, D.C. 20231

August 14, 1998

Sir:

The following preliminary amendments and remarks are respectfully submitted in connection with the above-identified application.

IN THE CLAIMS:

CLAIM 8: Lines 1 and 2, change "any one of claims 1 through 7" to -- claim 1--

CLAIM 12: Lines 1 and 2, change "any one of claims 9 through 11" to -- claim 9--

CLAIM 16: Lines 1 and 2, change "any one of claims 13 through 15" to --claim 13--

* * * * R E M A R K S * * * *

The above amendment to the claims place the application into better form prior to examination.


Favorable action on the above-identified application is respectfully requested.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-22448 for any additional fees required under 37 C.F.R. §1.16 or under 37 C.F.R. §1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

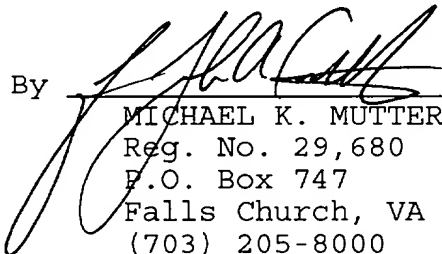 #35,094
MICHAEL K. MUTTER
Reg. No. 29,680
P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

MKM/tnp

TITLE OF THE INVENTION

Method of Adjusting the Brightness of an
Image, Digital Camera and Image Processor Using the
5 Method

FIELD OF THE INVENTION

10 The present invention relates to a method of adjusting
the brightness of an image read from film or image photographed
with a digital camera in reproducing the image as a photoprint
and also relates to a digital camera and an image processor
using the brightness adjustment method.

DESCRIPTION OF THE RELATED ART

15 Conventionally, as a method for adjusting the
brightness of an image photographed with a camera, etc., auto
exposure control is known. There is a widely used method which
assumes the mean brightness of a photographed screen to be
reflectance 18% and controls the diaphragm or shutter speed
of a camera so that the mean luminance (monochrome brightness)
value of a photographed screen becomes an exposure value
20 equivalent to reflectance 18%.

25 To obtain higher exposure accuracy, a final mean
luminance has also been computed by segmenting the entire
photographed screen into a plurality of regions and then taking
a mean value for each region or a difference between regions
into consideration (e.g., central emphasis photometry,
evaluation photometry, etc.). Particularly, some high grade

single-lens reflex cameras detect a principal subject by interlocking the automatic focusing mechanism, thereby enhancing exposure accuracy.

5 At a printer in a laboratory as well as at a camera side, an adjustment to brightness has also been made by controlling the number of exposure seconds in exposing recording paper so that the large area transmittance density (LATD) of a negative becomes a print density of 0.75 equivalent to reflectance 18%.

10 However, in the above-mentioned conventional methods, when an image whose contrast is relatively low, such as a photograph taken at cloudy weather, is reproduced, the print density tends to concentrate near 0.75, so that there is a problem that the reproduced image will look dark visually. Also, in methods such as central emphasis photometry, in the 15 case where a subject is not present at a central portion when 2 persons are photographed, there is a problem that an appropriate adjustment will not be made, so that the contents of an image are often influenced by a success of adjustment.

20 That is, the aforementioned conventional methods process an image so that it has appropriate brightness, on the assumption that a photographed screen meets standard conditions such as a condition that contrast is standard, a condition that a principal subject is located at a center, and 25 the like. For this reason, in the case where such standard

conditions are not met, there is a problem that an appropriate adjustment will not be always made.

SUMMARY OF THE INVENTION

The present invention has been made in view of the
5 aforementioned problems.

Accordingly, it is an object of the present invention
to provide a method of adjusting the brightness of an image
so that the image with appropriate brightness is always
obtained without being considerably influenced by the contents
of the image.
10

Another object of the invention is to provide a
digital camera and an image processor which is installed in
a laboratory, equipped with such a brightness adjustment
function.
15

The brightness adjustment method according to the
present invention is based on the following human visual
characteristic known as rule of thumb. Generally, the pixel
value of each pixel of a color image is often expressed by
three components: red (R), green (G), and blue (B) components.
20 Here, the brightness of each pixel is previously defined based
on the R, G, and B values. If the brightness histogram for
the defined image is computed, it is known that, in an image
considered to have been exposed appropriately by a
conventional method, pixels having the maximum value in the
25 definition of brightness always occupy a predetermined rate

(1% or so) of all pixels. In other words, in an appropriately exposed image, clipping always occurs at the maximum value of the brightness.

5 It is also known that, in an image such that
the density of a principal subject is approximately constant,
if the principal subject is not processed but at the
highlighted portion a value greater than a predetermined value
is clipped, the brightness impression will increase as a whole.
That is, based on the rule of thumb according to these, it may
safely be said that the impression regarding the brightness
of an image is determined by the frequency of a highlighted
portion rather than by the mean value of the entire image.

10
15 Therefore, in accordance with the above-mentioned
rule of thumb, the brightness adjustment method of the present
invention adjusts brightness, not based on a mean value but
based on the number (frequency) of pixels having the maximum
brightness. More specifically, the brightness adjustment
method of the present invention is characterized in that:

20 in image data which is acquired by an image
acquisition device and in which a pixel value of each
pixel is expressed as a set of three mutually independent
components and also in which the brightness of each pixel is
defined based on the three components,

25 a rate of pixels having the maximum brightness in the
definition to all pixels is made a predetermined rate by making

an adjustment to the image acquisition device and/or the pixel value.

Here, the "image acquisition device" is meant to include every possible means for acquiring digital image data or for digitizing and acquiring an image, such as a scanner, a digital camera, a media drive for reading an image recorded on a media storage, communication means for transmitting image data through networks, etc.

The "set of three mutually independent components" means a three-color colorimetric system which is generally used in expressing a color image, such as a RGB colorimetric system or a CMY colorimetric system, i.e., a colorimetric system in which three components become a color visually recognized to be gray when the values of the three components are consistent with each other.

As the method of defining brightness based on the three components, specifically there is a method which takes a mean value of R, G, and B values to be brightness, a method of defining brightness on the basis of luminance, and a method which takes the maximum value among R, G, and B values to be brightness. Although the method which takes the maximum value to be brightness has the best effect among the three methods, the definition of brightness in the present invention is not limited to these examples.

The feature of the present invention resides in that the rate of pixels having the maximum brightness in the aforementioned definition to all pixels is made a predetermined ratio. As a method for obtaining this end, a method of adjusting the gain of an image acquisition device so that acquired data always becomes image data meeting the above-mentioned condition and a method of performing a transformation process on image data after acquisition so that the image data becomes image data meeting the above-mentioned condition are considered.

As a specific example of the gain adjustment method, there is a method of adjusting an exposure value at the time of photographing in the case where an image acquisition device is a digital camera, for example. In this case, if the same scene is rephotographed with the exposure value after adjustment, a photographed image with appropriate brightness can be acquired.

A digital camera of the present invention is a camera with the above-mentioned function and comprises:

image pick-up means for photographing an image and acquiring image data in which a pixel value of each pixel is expressed as a set of three mutually independent components;

brightness analyzing means for computing a histogram of the brightness of the pixel defined based on the three

components for the image data acquired by the image pick-up means; and

exposure control means for making an adjustment to an exposure value at the time of photographing on the basis of the histogram so that a rate of pixels having the maximum brightness in the definition to all pixels becomes a predetermined rate.

Specifically, the "computing a histogram of the brightness" means that a brightness histogram is made by performing arithmetic in accordance with a definition equation for brightness by the use of the R, G, and B values of each pixel and then totaling computed brightness for each value.

The adjustment to the exposure value is made by controlling the diaphragm or shutter of a camera. This can be done by the same method as the aforementioned conventional auto exposure.

The data transformation to the image data after acquisition is performed, for example, when a photoprint is made in an image reproducing system installed in a laboratory. But as in digital cameras, in the case where data processing is possible at a camera side, the data transformation process may be performed at a camera side. It is also possible to perform the data transformation process by a personal computer, etc.

Specifically, an image processor according to the present invention is the above-mentioned image reproducing system in a laboratory, a personal computer, etc. The image processor comprises:

5 data acquisition means for acquiring an image as digital data in which a pixel value of each pixel is expressed as a set of three mutually independent components;

10 brightness analyzing means for computing a histogram of the brightness of the pixel defined based on the three components for the digital data acquired by the data acquisition means; and

15 data transformation means for performing a data transformation process on the acquired digital data on the basis of the histogram so that a rate of pixels having the maximum brightness in the definition to all pixels is made a predetermined rate.

20 In the above-mentioned brightness adjustment method, digital camera, and image processor of the present invention, the following processes are performed in order to cause the rate of pixels having the maximum brightness to all pixels to be a predetermined rate. For example, in the case where the pixel value is a value expressed in terms of a linear scale or power scale, the exposure value of a camera is adjusted, or a data transformation is performed, based on the following

25 Eq. (1):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = k \begin{pmatrix} R \\ G \\ B \end{pmatrix} \dots (1)$$

where R', G', and B' are the three components after a transformation; R, G, and B are the three components before a transformation; and k is a constant determined according to the aforementioned rate.

Also, in the case where the pixel value is a value expressed in terms of a logarithmic scale, the exposure value of a camera is adjusted, or a data transformation is performed, based on the following Eq. (2):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = \begin{pmatrix} R \\ G \\ B \end{pmatrix} + \begin{pmatrix} k \\ k \\ k \end{pmatrix} \dots (2)$$

where R', G', and B' are the three components after a transformation; R, G, and B are the three components before a transformation; and k is a constant determined according to the aforementioned rate.

While the two above-mentioned equations adjust a histogram over the entire range, a method which does not change a dark portion but adjusts only a portion with high brightness is also considered. But the present invention is not limited to these brightness adjustment methods.

As previously described, the brightness adjustment method of the present invention judges whether or not the brightness of an image is appropriate by a brightness histogram, based on the rule of thumb that when a brightness histogram is computed for an image exposed appropriately by a conventional method, the rate of pixels having the maximum brightness occupies a predetermined rate. And the brightness adjustment method adjusts the gain of an image acquisition device or the pixel value of image data so that this histogram meets the above-mentioned condition.

In other words, the brightness adjustment method of the present invention is not based on the assumption that a photographed image meets some condition, as in the conventional method, but it is based on a condition necessary for an image with appropriate brightness. And since the present invention processes an image so that it meets the necessary condition, good results are always obtained regardless of the image contents.

This method is applicable even when an image is acquired and also even after acquisition.

That is, as in a digital camera of the present invention, if the camera main body is equipped with brightness analyzing means for computing a histogram of the brightness of an image and exposure control means for making an adjustment to an exposure value on the basis of the histogram so that a photographed image meets the above-mentioned condition, an image of appropriate brightness can be obtained at all times.

Also, even in the case where the method according to the present invention cannot be applied when an image is acquired, if as in the image processor of the present invention a device, equipped with brightness analyzing means for computing a histogram of the brightness of an acquired image and data transformation means for performing a data transformation process on the basis of the histogram so that the image meets the aforementioned condition, is installed in a laboratory for reproducing an image, the reproduced image can have appropriate brightness.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described in further detail with reference to the accompanying drawings wherein:

FIG. 1 is a diagram showing the brightness histogram of an image appropriately exposed by a conventional method;

FIG. 2 is a diagram showing an embodiment of a brightness adjustment method according to the present invention;

FIG. 3 is a block diagram showing an embodiment of an image processor according to the present invention; and

FIG. 4 is a block diagram showing an embodiment of a digital camera according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A preferred embodiment of the present invention will hereinafter be described in detail in reference to the drawings. Initially, a description will be made of the human visual characteristic regarding brightness. Fig. 1 shows a brightness histogram example of negative film appropriately exposed by a conventional method. As shown in the figure, it is known that, in an appropriately exposed image, clipping 2 (1% or so) always occurs at the maximum brightness of brightness histogram 1.

It is also known that, if the dark portion (whose density is high) of an exposed image is not processed but only the bright portion is adjusted, then the impression of brightness received from the entire image will vary.

Particularly in a brightness histogram, if for an image in which the frequency of a pixel becomes gradually lower as brightness becomes higher, a value equal to or greater than a predetermined value is clipped at the predetermined value (the toe of the highlighted portion is cut), the impression of brightness will increase visually.

In other words, it is considered that the human impression of brightness obtained from an image is determined by the frequency of a highlighted portion rather than by an overall mean value. Therefore, the present invention processes an image, not based on the idea of a mean value in a conventional method but based on the idea that the frequency of the maximum brightness in a brightness histogram is managed.

Fig. 2 shows as an embodiment of a method of the present invention an example of a case of adjusting brightness so that image data, read by a film scanner or the like, looks brighter. The brightness histogram 3 in Fig. 2 is a histogram before an adjustment is made, while the brightness histogram 4 is a histogram after an adjustment has been made.

Here, a description will be made of a method of adjusting brightness. First, a description will be made of the definition of brightness. In this embodiment, each pixel value of an image is expressed as a combination of three components: red (R), green (G), and blue (B) components. Based on these three components, the brightness L of each pixel is defined like the following Eq. (3):

$$L = \max(R, G, B) \quad \text{--- (3)}$$

where L is the brightness of a pixel; R, G, and B are the red, green; and blue components, and $\max(x, y, z)$ is the maximum value among x, y, and z.

Note that the definition of brightness in the
5 brightness adjustment method according to the present invention is not necessarily limited to the above-mentioned Eq. (3). For example, the brightness L may be defined like the following Eq. (4):

$$L = \text{median}(R, G, B) \quad \text{--- (4)}$$

where L is the brightness of a pixel; R, G, and B are
10 the red, green, and blue components; and $\text{median}(x, y, z)$ is a median among x, y, and z.

The brightness L may also be defined like the following Eq. (5):

$$L = 0.3R + 0.6G + 0.1B \quad \text{--- (5)}$$

In addition, the brightness L can be defined
15 in various manners.

Assuming each of the R, G, and B values for each pixel is expressed as 8-bit data, the brightness that is obtained based on the above-mentioned Eq. (3) can also be expressed as 8-bit data. In this case the value which the

brightness can assume is a value between 0 and 255 (corresponding to the horizontal axis of the histogram in Fig. 2).

In this embodiment, the histogram 3 is adjusted so that 1% clipping occurs at the maximum brightness (255), as in the histogram 4. For this reason, the following arithmetic is performed.

In Fig. 2, brightness t is a value such that the area of the shaded portion of the histogram 3 is 1% of the entire area of the histogram 3. In other words, assuming the histogram 3 is $H(x)$, the following Eq. (6) is established.

$$\int_t^{255} H(x)dx = 0.01 \dots (6)$$

Therefore, if the clipping rate at the maximum brightness is determined, a specific value of t can be computed from the above-mentioned Eq. 6.

For example, in the case where R , G , and B components and brightness L are expressed in terms of a linear scale or exponential scale, if computed brightness t is substituted into the following Eq. (1), the brightness histogram 3 is transformed to the brightness histogram 4.

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = k \begin{pmatrix} R \\ G \\ B \end{pmatrix} \dots (1)$$

where R', G', and B' are the red, green, and blue components after a transformation; R, G, and B are the red, green, and blue components before a transformation; and k is a constant determined according to the aforementioned rate.

5 Similarly, in the case where R, G, and B components and brightness L are expressed in terms of a logarithmic scale, if computed brightness t is substituted into the following Eq. (2), 1% clipping can be made to occur at the maximum brightness.

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = \begin{pmatrix} R \\ G \\ B \end{pmatrix} + \begin{pmatrix} k \\ k \\ k \end{pmatrix} \dots (2)$$

10 where R', G', and B' are the red, green, and blue components after a transformation; R, G, and B are the red, green, and blue components before a transformation; and k is a constant determined according to the aforementioned rate. Assuming the histogram 4 after adjustment is H'(x), H'(255) = 0.01
15 is established.

The aforementioned process can be implemented by an image processor with constitution shown in Fig. 3. In the

embodiment shown in Fig. 3, although an image processor according to the present invention is carried out as a photo-finishing system which is installed in a laboratory, etc., the present invention may be carried out by incorporating software which executes the above-mentioned process into a general-purpose personal computer.

The image processor of Fig. 3 has data acquisition means 5 for acquiring digital data which represents an image, brightness analyzing means 6 for making the above-mentioned histogram, and data transformation means 7 for generating image data which has a histogram such as the brightness histogram 4 by performing arithmetic such as the above-mentioned. Furthermore, in this embodiment the image data transformed by data transformation means 7 can be output as a photoprint by a photographic printer 8. Specifically, the data acquisition means 5 is a connecting interface with a digital camera 9, or a card reader for reading a digital camera memory; a film scanner for reading developed film 10; a media drive for reading media 11 such as CD-R; communication means (not shown) for receiving image data from networks; etc.

While a description has been made in the case of adjusting brightness by transforming image data, the method according to the present invention can also be incorporated

as a single function of an image data acquisition device such as a digital camera, a film scanner, etc.

For example, since the quantum level of a digital camera is proportional to (the luminance E of a subject)^{1/2.2}, if the diaphragm or shutter speed is adjusted to control the exposure, each pixel value of image data obtained by photographing can be adjusted.

Fig. 4 shows the constitution of a digital camera according to the present invention. This digital camera is constituted by image pick-up means 12 such as a lens or a charge-coupled device (CCD), brightness analyzing means 13 for making the above-mentioned brightness histogram for an image obtained by photographing, and exposure control means 14 for making an adjustment to the diaphragm or shutter speed on the basis of the made brightness histogram.

According to such a digital camera, for example, even when a photographed image were overexposed and therefore in the brightness histogram the rate of pixels having the maximum brightness (255) were of the order of 5%, exposure control can be performed so that the gain is reduced from 5% to 1%. If photographing is again performed with a reset exposure value, image data such that the rate of pixels having the maximum brightness is 1%, i.e., image data with appropriate brightness, can be acquired.

As previously described, the present invention judges whether or not the brightness of an image is appropriate by the brightness histogram and adjusts this brightness histogram so that it meets the above-mentioned condition.

5 Therefore, an object of adjustment may be either the gain of an image acquisition device or the pixel value of image data. Furthermore, it is also possible to make a fine brightness adjustment by a combination of the brightness adjustment function in the above-mentioned digital camera and the brightness adjustment function in the above-mentioned image processor.

10 While the present invention has been described with reference to preferred embodiments thereof, the invention is not to be limited to the details given herein, but may be modified within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A a method of adjusting the brightness of an image, the method wherein image data are acquired by an image acquisition device, in said data a pixel value of each pixel is expressed as a set of three mutually independent components and the brightness of each pixel being defined based on said three components,

said method comprising a step of making a rate of pixels having the maximum brightness in said the definition to all pixels a predetermined rate by making an adjustment to said image acquisition device and/or said pixel value.

2. The method as set forth in claim 1, wherein said image acquisition device is a digital camera and the adjustment to said image acquisition device is an adjustment to an exposure value at the time of photographing by said digital camera.

3. The method as set forth in claim 2, wherein said pixel value is a value expressed in terms of a linear scale or power scale and wherein the adjustment to said exposure value is made based on the following transformation Eq. (1):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = k \begin{pmatrix} R \\ G \\ B \end{pmatrix} \dots (1)$$

where R', G', and B' are the three components after a transformation; R, G, and B are the three components before

a transformation; and k is a constant determined according to said rate.

4. The method as set forth in claim 2, wherein said pixel value is a value expressed in terms of a logarithmic scale and the adjustment to said exposure value is made based on the following transformation Eq. (2):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = \begin{pmatrix} R \\ G \\ B \end{pmatrix} + \begin{pmatrix} k \\ k \\ k \end{pmatrix} \dots (2)$$

where R', G', and B' are the three components after a transformation; R, G, and B are the three components before a transformation; and k is a constant determined according to said rate.

5. The method as set forth in claim 1, wherein said image acquisition device is a data acquisition device for acquiring an image as digital data and the adjustment to said pixel value is a data transformation process of transforming the acquired digital data.

6. The method as set forth in claim 5, wherein said pixel value is a value expressed in terms of a linear scale or power scale and said data transformation process is a process based on

the following transformation Eq. (1):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = k \begin{pmatrix} R \\ G \\ B \end{pmatrix} \dots (1)$$

where R', G', and B' are the three components after a transformation; R, G, and B are the three components before a transformation; and k is a constant determined according to said rate.

5 7. The method as set forth in claim 5, wherein said pixel value is a value expressed in terms of a logarithmic scale and said data transformation process is a process based on the following transformation Eq. (2):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = \begin{pmatrix} R \\ G \\ B \end{pmatrix} + \begin{pmatrix} k \\ k \\ k \end{pmatrix} \dots (2)$$

10 where R', G', and B' are the three components after a transformation; R, G, and B are the three components before a transformation; and k is a constant determined according to said rate.

15 8. The method as set forth in any one of claims 1 through 7, wherein said brightness is defined by the following Eq. (3):

$$L = \max(R, G, B) \quad \text{--- (3)}$$

where L is the brightness of a pixel; R, G, and B are the three components; and $\max(x, y, z)$ is the maximum value among x, y, and z.

9. A digital camera comprising:

5 image pick-up means for photographing an image and acquiring image data in which a pixel value of each pixel is expressed as a set of three mutually independent components;

brightness analyzing means for computing a histogram of the brightness of said pixel defined based on said three components for said image data acquired by said image pick-up means; and

10 exposure control means for making an adjustment to an exposure value at the time of photographing on the basis of said histogram so that a rate of pixels having the maximum brightness in the definition to all pixels becomes a predetermined rate.

15 10. The digital camera as set forth in claim 9, wherein said pixel value is a value expressed in terms of a linear scale or power scale and the adjustment to said exposure value is made based on the following transformation Eq. (1):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = k \begin{pmatrix} R \\ G \\ B \end{pmatrix} \dots (1)$$

where R', G', and B' are the three components after a transformation; R, G, and B are the three components before a transformation; and k is a constant determined according to said rate.

5 11. The digital camera as set forth in claim 9, wherein said pixel value is a value expressed in terms of a logarithmic scale and the adjustment to said exposure value is made based on the following transformation Eq. (2):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = \begin{pmatrix} R \\ G \\ B \end{pmatrix} + \begin{pmatrix} k \\ k \\ k \end{pmatrix} \dots (2)$$

10 where R', G', and B' are the three components after a transformation; R, G, and B are the three components before a transformation; and k is a constant determined according to said rate.

15 12. The digital camera as set forth in any one of claims 9 through 11, wherein said brightness is defined by the following Eq. (3):

$$L = \max(R, G, B) \quad \text{--- (3)}$$

where L is the brightness of a pixel; R, G, and B are the three components; and max(x, y, z) is the maximum value among x, y, and z.

13. An image processor comprising:

data acquisition means for acquiring an image as digital data in which a pixel value of each pixel is expressed as a set of three mutually independent components;

5 brightness analyzing means for computing a histogram of the brightness of said pixel defined based on said three components for said digital data acquired by said data acquisition means; and

10 data transformation means for performing a data transformation process on the acquired digital data on the basis of said histogram so that a rate of pixels having the maximum brightness in the definition to all pixels is made a predetermined rate.

15 14. The image processor as set forth in claim 13, wherein said pixel value is a value expressed in terms of a linear scale or power scale and said data transformation process is a process based on the following transformation Eq. (1):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = k \begin{pmatrix} R \\ G \\ B \end{pmatrix} \dots (1)$$

20 where R', G', and B' are the three components after a transformation; R, G, and B are the three components before

a transformation; and k is a constant determined according to said rate.

15. The image processor as set forth in claim 13, wherein said pixel value is a value expressed in terms of a logarithmic scale and said data transformation process is a process based on the following transformation Eq. (2):

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = \begin{pmatrix} R \\ G \\ B \end{pmatrix} + \begin{pmatrix} k \\ k \\ k \end{pmatrix} \dots (2)$$

where R', G', and B' are the three components after a transformation; R, G, and B are the three components before a transformation; and k is a constant determined according to said rate.

16. The image processor as set forth in any one of claims 13 through 15, wherein said brightness is defined by the following Eq. (3):

$$L = \max(R, G, B) \quad \text{--- (3)}$$

where L is the brightness of a pixel; R, G, and B are the three components; and max(x, y, z) is the maximum value among x, y, and z.

ABSTRACT OF THE DISCLOSURE

The brightness of image data is previously defined based on the R, G, and B values of each pixel. In an image considered to have been exposed appropriately by a conventional method, when the brightness histogram for the defined image is computed, pixels having the maximum value in the definition of brightness always occupy a predetermined rate (1% or so) of all pixels. Based on this rule of thumb, the gain of an image acquisition device or the pixel value of acquired data is adjusted so that a brightness histogram (3) for image data which is an object of adjustment becomes a histogram (4) having the same characteristic as the above-mentioned appropriately exposed image.

FIG. 1

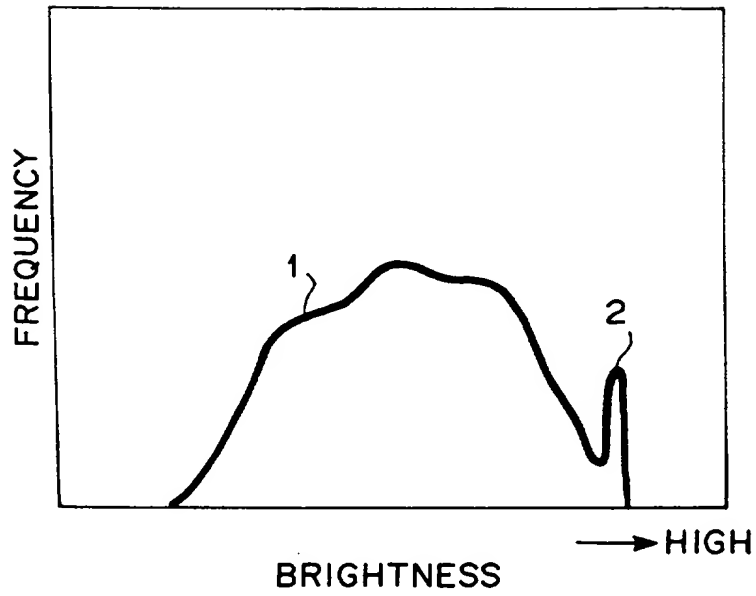


FIG. 2

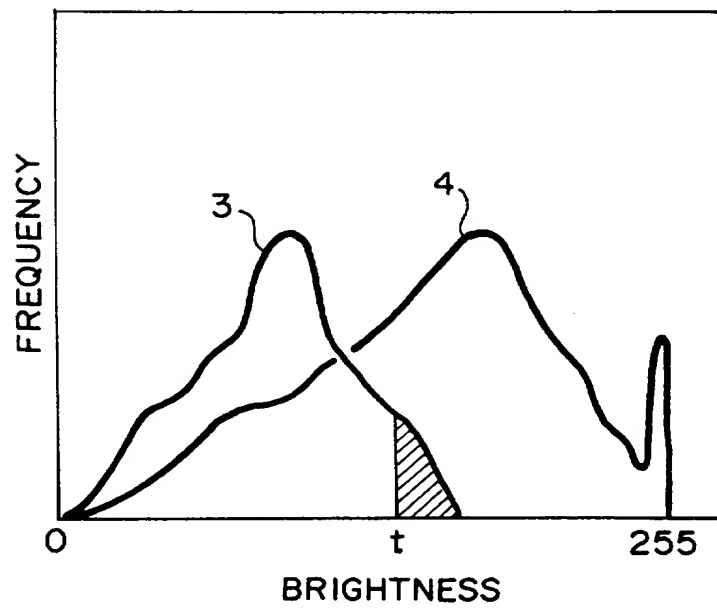


FIG. 3


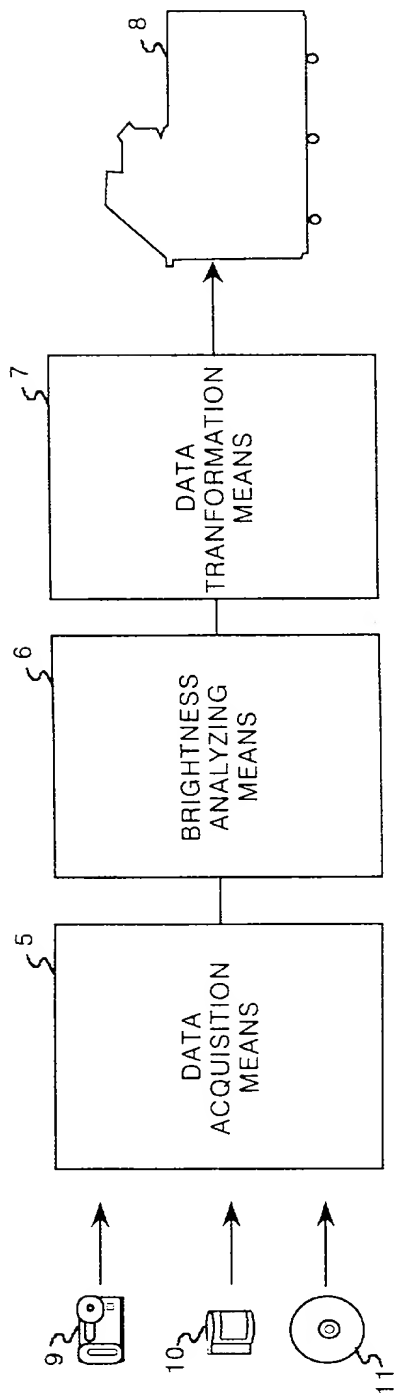


FIG. 4

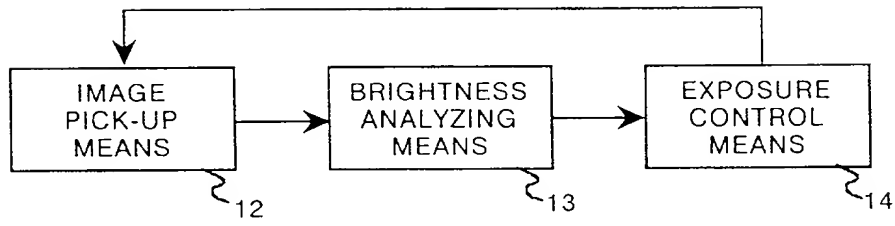

Declaration and Power of Attorney For Patent Application**特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

☐ __月__日に提出され、米国出願番号または特許協定条約国際出願番号を_____とし、
（該当する場合）_____に訂正されました。

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

As a below named inventor, I hereby declare that:

Takafumi Noguchi

My residence, post office address and citizenship are as stated next to my name. c/o Fuji Photo Film Co., Ltd.
210 Nakanuma, Minamiashigara-shi,
Kanagawa-ken, Japan

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
"METHOD OF ADJUSTING THE BRIGHTNESS
OF AN IMAGE, DIGITAL CAMERA AND

IMAGE PROCESSOR USING THE METHOD"

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米 国以外の国の少なくとも一カ国を指定している特許協力条約 365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

(patent) 219480/1997

(Number)
(番号)

Japan

(Country)
(国名)(Number)
(番号)(Country)
(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

14/8/1997

(Day/Month/Year Filed)
(出願年月日)(Day/Month/Year Filed)
(出願年月日)☐☐

私は、第35編米国法典119条(e)項に基づいて下記の米 国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)(Filing Date)
(出願日)(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米 国特許出願に記載された権利、又は米 国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米 国特許出願に開示されていない限り、その先行米 国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)
(出願番号)(Filing Date)
(出願日)(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)(Application No.)
(出願番号)(Filing Date)
(出願日)(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の
 手続きを米特許商標局に対して遂行する弁理士または代理人
 として、下記の者を指名いたします。(弁理士、または代理
 人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
 the following attorney(s) and/or agent(s) to prosecute this
 application and transact all business in the Patent and Trademark
 Office connected therewith (list name and registration number)

TERRELL C. BIRCH (Reg. No. 19,382)
 RAYMOND C. STEWART (Reg. No. 21,066)
 JOSEPH A. KOLASCH (Reg. No. 22,463)
 ANTHONY L. BIRCH (Reg. No. 26,122)

JAMES M. SLATTERY (Reg. No. 28,380)
 BERNARD L. SWEENEY (Reg. No. 24,448)
 MICHAEL K. MUTTER (Reg. No. 29,680)
 CHARLES GORENSTEIN (Reg. No. 29,271)

GERALD M. MURPHY (Reg. No. 28,977)
 LEONARD R. SVENSSON (Reg. No. 30,330)
 TERRY L. CLARK (Reg. No. 32,644)
 ANDREW D. MEIKLE (Reg. No. 32,868)

MARC S. WEINER (Reg. No. 32,181)
 ANDREW F. REISH (Reg. No. 33,443)
 JOE M. MUNCY (Reg. No. 32,334)
 C. JOSEPH FARACI (Reg. No. 32,350)

書類送付先

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP
 P.O. BOX 747
 FALLS CHURCH, VA 22040-0747
 TEL: (703) 205-8000

直接電話連絡先： (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

BIRCH, STEWART, KOLASCH & BIRCH, LLP
 TEL: (703) 205-8000

唯一または第一発明者名		Full name of sole or first inventor	
		Takafumi Noguchi	
発明者の署名	日付	Inventor's signature	Date
		<i>Takafumi Noguchi</i>	July 31, 1998
住所		Residence	
		Kanagawa-ken, Japan	
国籍		Citizenship	
		Japan	
私書箱		Post Office Address	
		c/o Fuji Photo Film CO., Ltd., 210 Nakanuma,	
		Minamiashigara-shi, Kanagawa-ken, Japan	
第二共同発明者		Full name of second joint inventor, if any	
第二共同発明者	日付	Second inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	

(第三以降の共同発明者についても同様に記載し、署名をす
 ること)

(Supply similar information and signature for third and subsequent
 joint inventors.)